


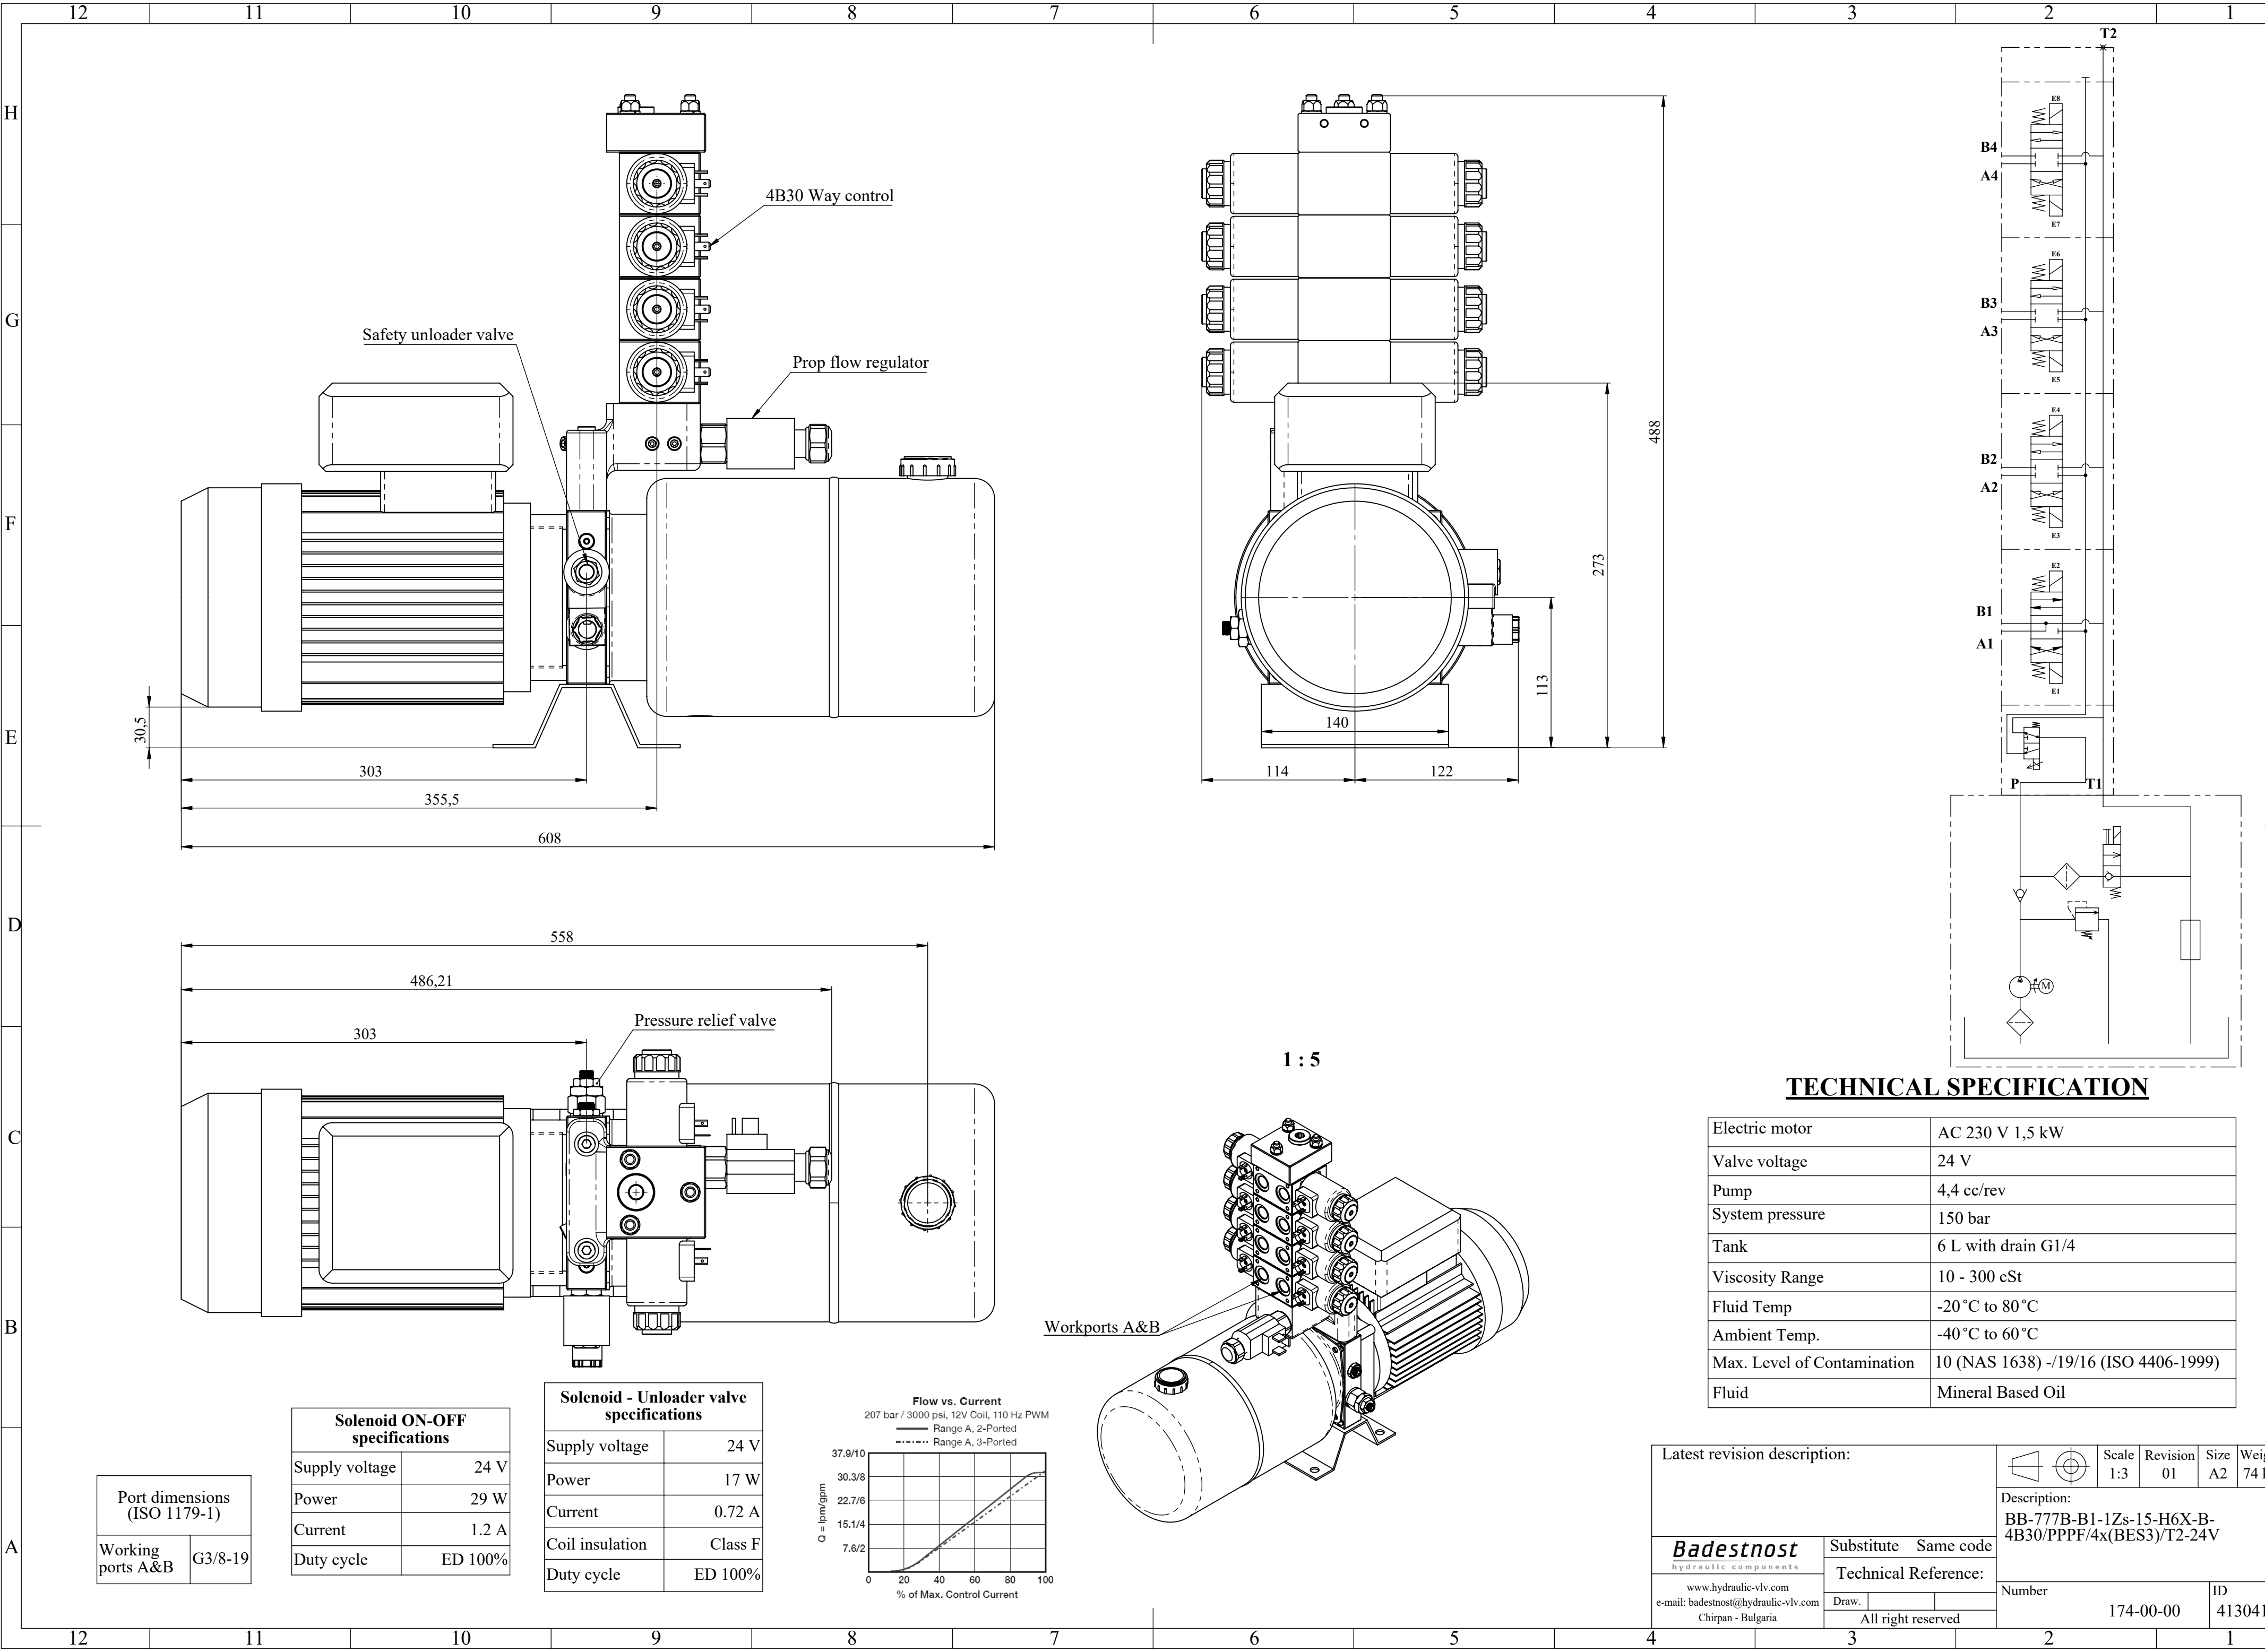

TECHNICAL SPECIFICATION

Electric motor	AC 230 V 1,5 kW
Valve voltage	24 V
Pump	4,4 cc/rev
System pressure	150 bar
Tank	6 L with drain G1/4
Viscosity Range	10 - 300 cSt
Fluid Temp	-20 °C to 80 °C
Ambient Temp.	-40 °C to 60 °C
Max. Level of Contamination	10 (NAS 1638) -/19/16 (ISO 4406-1999)
Fluid	Mineral Based Oil

Latest revision description:				Scale	Revision	Size	Weight
		1:3	01	A2	74 kg		
		Description: BB-777B-B1-1Zs-15-H6X-B-4B30/PPPF/4x(BES3)/T2-24V					
Badestnost hydraulic components www.hydraulic-vlv.com e-mail: badestnost@hydraulic-vlv.com Chirpan - Bulgaria	Substitute		Same code				
	Technical Reference:						
	Draw.			Number			ID
	All right reserved						
				174-00-00		4130419	

Port dimensions (ISO 1179-1)	
Working ports A&B	G3/8-19

Solenoid ON-OFF specifications	
Supply voltage	24 V
Power	29 W
Current	1.2 A
Duty cycle	ED 100%

Solenoid - Unloader valve specifications	
Supply voltage	24 V
Power	17 W
Current	0.72 A
Coil insulation	Class F
Duty cycle	ED 100%

